STAINLESS STEEL
LOW PROFILE SCALES

100g to 2ton

Features :

- Low Profile construction with S.S. ramp (Optional) to avoid pit in production area.
- Incorporates multiple number (4 nos) of high quality stainless steel IP 67/68 shear beam loadcells.
- Stainless Steel S.S. 202 Platform (S.S.304/ S.S.316 optional).
- Stainless Steel IP67 GLP compliant Indicator with Real Time Clock (Optional).
- Large LCD dispaly with white backlite.

Specifications :

Models	CPL-500K100	CPL-1T200	CPL-2T500
Capacity	500kg	1ton	2ton
Readability	100g	200g	500g
Repeatability (+/-)	100g	200g	500g
Linearity (+/-)	200g	400g	1kg
Platform Size(mm)	1000x1000	1000x1000	1200x1200

Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C

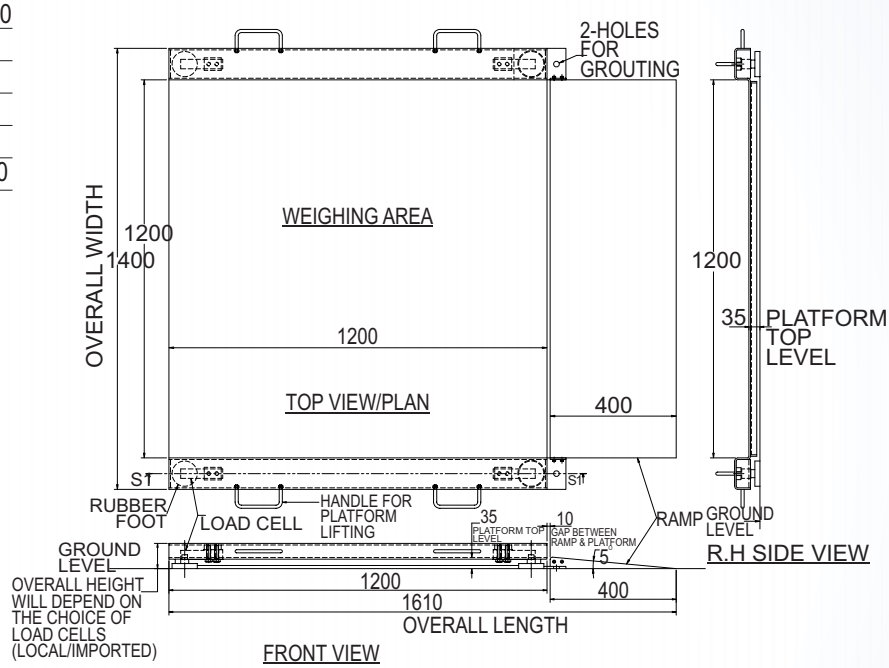

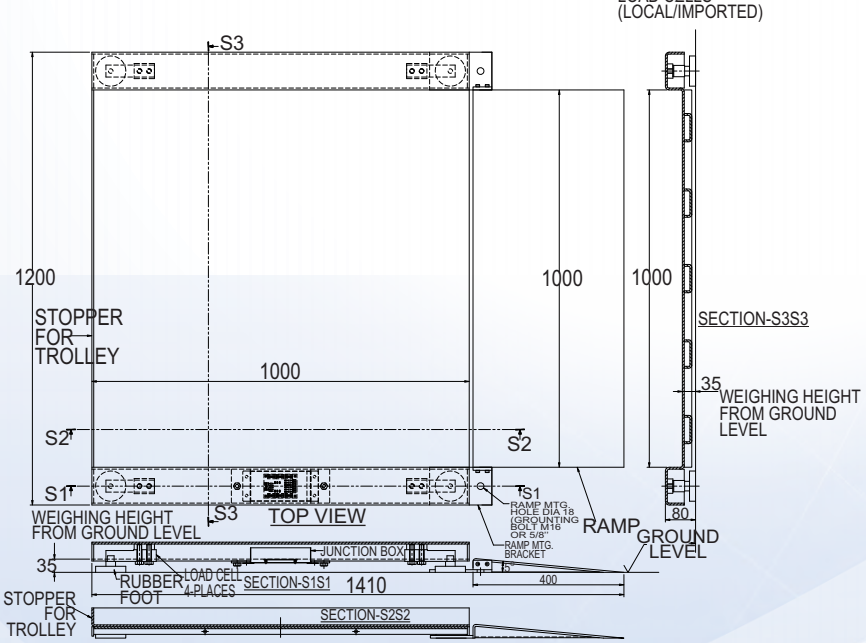

All Specifications and designs are subject to change for improvement.

CONTECH® Instruments Ltd.
AN ISO 9001,14001 & OHSAS 18001 COMPANY
Where innovation never stops.....

301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. :+91 22 6139 3000 (100 lines)
Fax :+91 22 2761 8421
E-mail : info@contechindia.in / sales@contechindia.in
Website: www.contechindia.com